
<u>ک</u>

1300 - STATIONARY WALL MOUNTED BACKSTOP



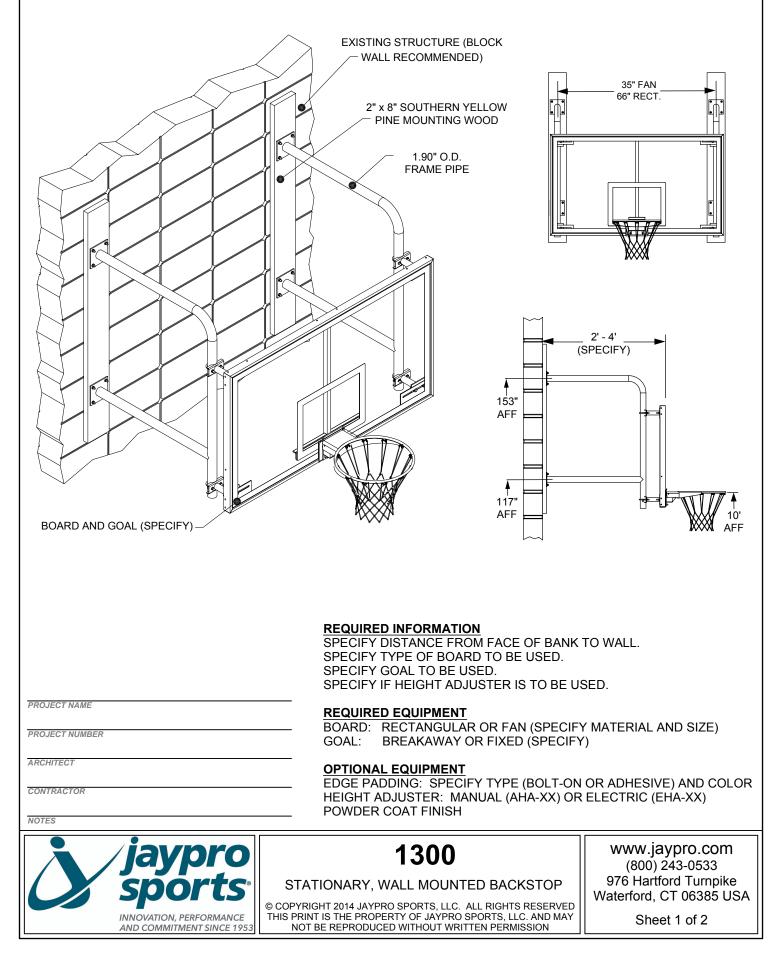

SPECIFICATION SHEET

EXTENSION

Backstop shall be a wall mounted and wall braced style with the bank face being extended (24" to 48") from the supporting wall. Reverse "C" pipe extension frames shall be fabricated of 1.90" OD high strength pipe. Wall ends of the frame shall terminate in heavy steel plates for attachment to wall pads. Special board attachment hardware shall be included.

BRACING

Backstop shall require no internal bracing due to the inherent rigidity of the welded structure.

SUPPORT

Backstop shall be wall mounted and supported. Unit shall be formed and welded by Certified welders meeting the requirements of AWS D1.1 - Sheet Metal Welding Code and AWQ D1.1 - Structural Steel Welding Code. Installation shall be to CMU wall for best results. Non-CMU walls will require the wall to be specially fabricated to support the entire assembly.

MOUNTING

All wall pads shall be southern yellow pine. All edges shall be chamfered and finished with two (2) coats of clear lacquer.

FINISH

Entire unit is powder coated black standard, with custom colors as an option. All metal fittings shall be packaged for protection during shipment. Custom colors include fully enclosed wrapping for added protection.

OPTIONS

- Safe-Pro[™] Edge Padding (*Refer to MBBP-6 Specification Sheet*)
- Manual Height Adjuster (Refer to AHA-XX Specification Sheet)
- Electric Height Adjuster (*Refer to EHA-XX Specification Sheet*)

