


PLEASE NOTE:

- 1) FOR SAFE OPERATION AND CONTINUED HIGH PERFORMANCE FROM THIS EQUIPMENT, INSPECTION AND MAINTENANCE MUST BE PERFORMED BEFORE EACH USE
- 2) USE OF THIS EQUIPMENT OTHER THAN INTENDED, MAY BE HAZARDOUS.
- 3) ALTERATION OR MODIFICATION OF EQUIPMENT MAY BE HAZARDOUS. FOR REPAIR OR REPLACEMENT, PLEASE CALL YOUR DEALER

ADJUST CHAIN LENGTH WITH SNAP HOOK SO THAT PLATFORM IS LEVEL WHEN BEING USED

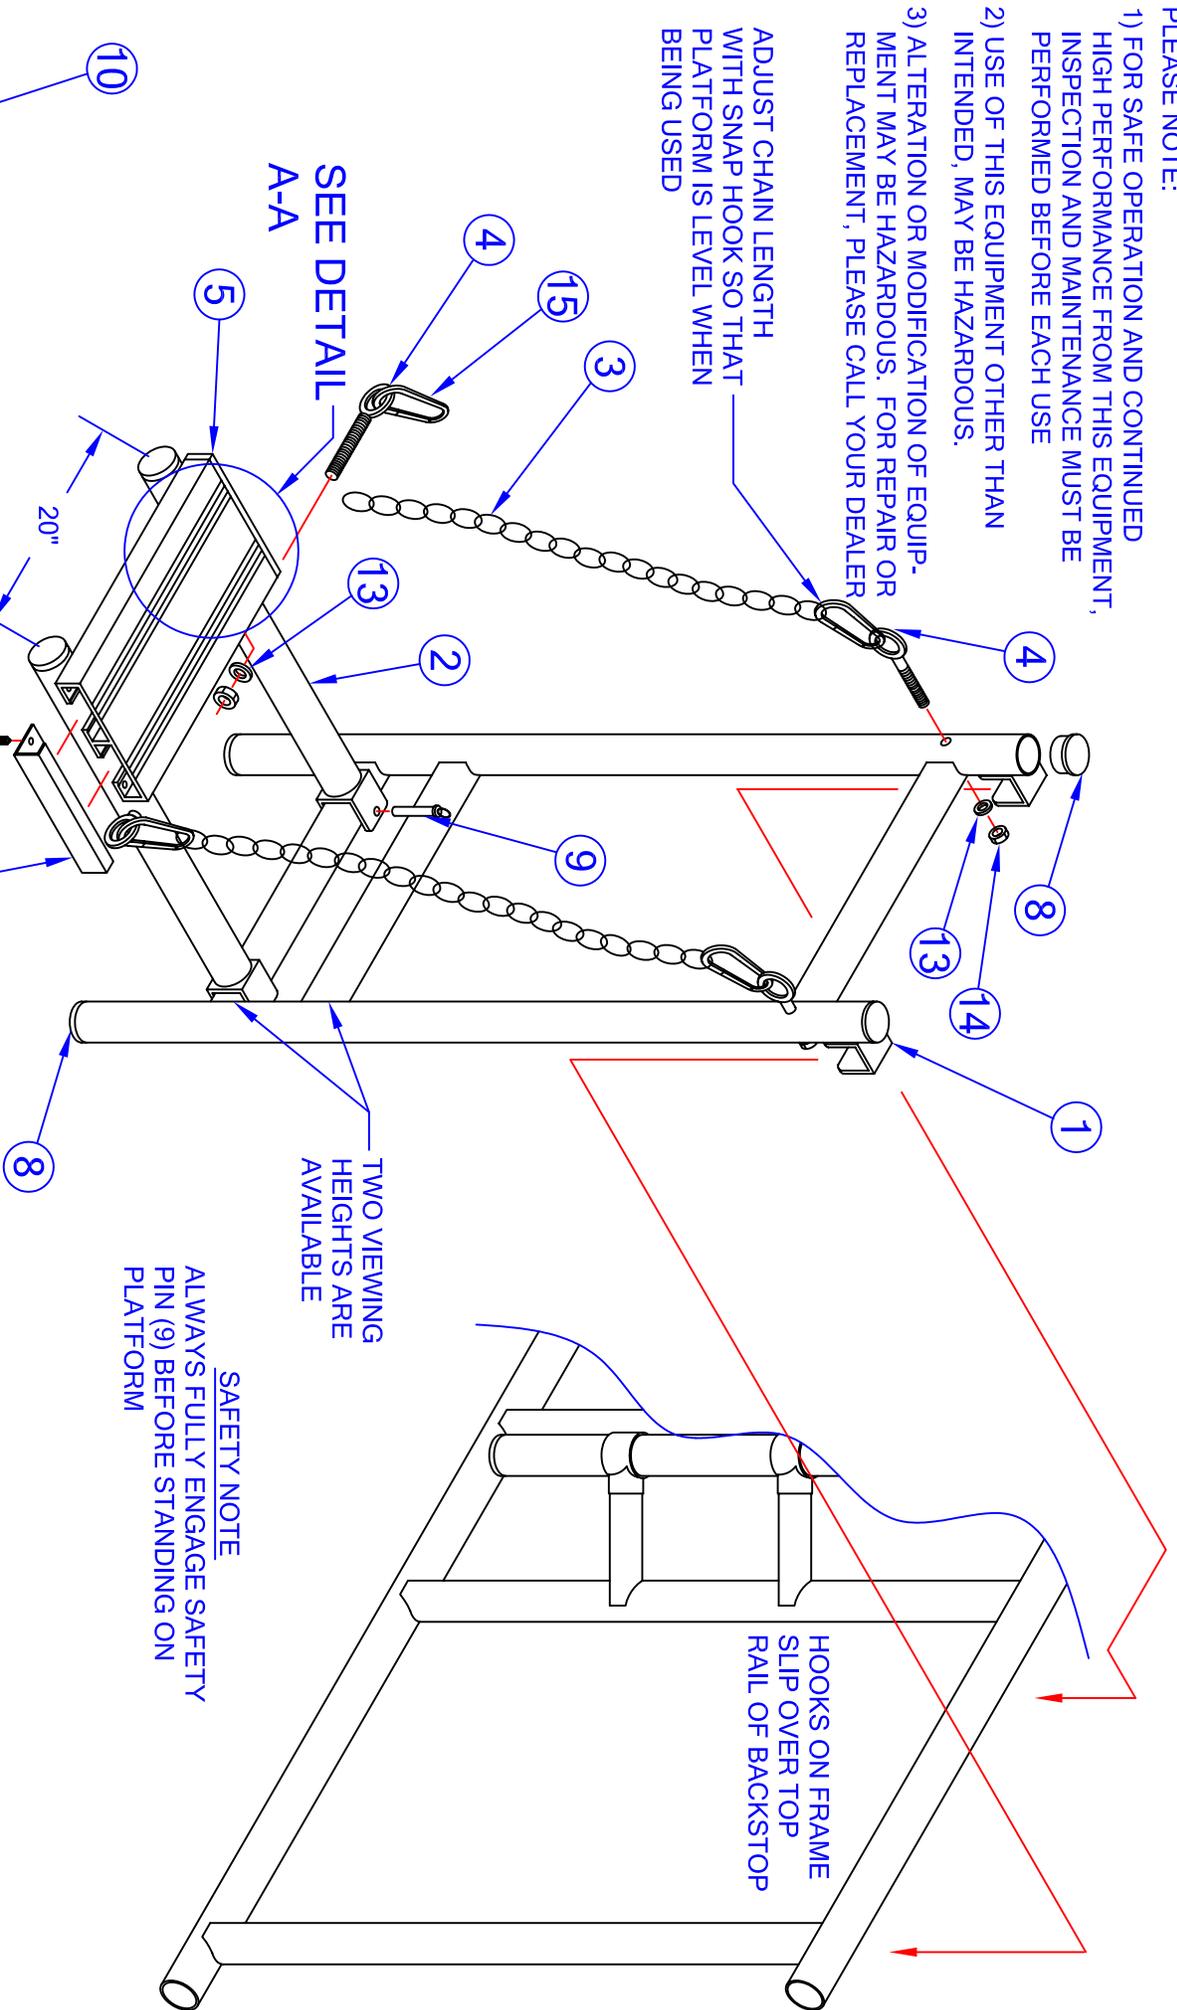

SAFETY NOTE
ALWAYS FULLY ENGAGE SAFETY PIN (9) BEFORE STANDING ON PLATFORM

TWO VIEWING HEIGHTS ARE AVAILABLE

HOOKS ON FRAME SLIP OVER TOP RAIL OF BACKSTOP

DETAIL A-A

Jaypro Sports
976 Hartford Turnpike
Waterford, CT 06385 USA
(800)243-0533
(800)988-3363 Fax
www.jaypro.com

MODEL NO.:
CVS-10

PRODUCT NAME:
VIEWING STAND

DRAWN BY: JA

EFFECTIVE DATE:
3-14-05

JAYPRO SPORTS
VIEWING STAND, CVS-10
LIST OF MATERIALS

<u>PIECE NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>QTY.</u>
1	CVS101	FRAME ASSEMBLY-LADDER	1
2	CVS102	SUPPORT BRACE	2
3	CVS104	CHAIN x 5'	2
4	HB5028	EYEBOLT 3/8"-16 x 3"	4
5	CVS103	PLATFORM PLANK	1
6	AR5045	END CAP	2
7	HS5035	#8 PAN HEAD SCREW x 1/2"	4
8	RP4076	END PLUG	6
9	HM6206	5/16" x 3" QUICK RELEASE PIN	2
10	AR5044	BOLT CLIP	4
11	HB5030	5/16"-18 x 3" CARRIAGE BOLT	4
12	HN5046	5/16" FLANGE NUT	4
13	HW337	3/8" LOCK WASHER	4
14	HN266	3/8" HEX NUT	4
15	HM5054	SNAP HOOK 5/16"	4

ASSEMBLY INSTRUCTIONS

TOOLS REQUIRED: PHILLIPS SCREWDRIVER BIT WITH DRILL (1)

1/2" SOCKET WRENCH OR ADJUSTABLE WRENCH (1)

9/16" SOCKET WRENCH OR ADJUSTABLE WRENCH (1)

1. Slip end caps (6) onto the platform plank (5) and fasten in place using the self-drilling #8 x 1/2" screws (7) as indicated. Per detail 'a-a', position support braces (2) approximately 20" on center and assemble the platform plank (5) using bolt clips (10), carriage bolt 5/16"-18 x 3" (11) and flange nut 5/16" (12). Square the support braces and tighten the hardware firmly.
2. Assemble the eyebolts 3/8"-16 x 3" (4) thru the support braces (1 eyebolt facing left and 1 eyebolt facing right as shown) and secure with lockwashers 3/8" (13) and hex nuts 3/8" (14). Tighten hardware firmly. Also assemble eyebolts (4) at the top of the frame assembly as shown on the illustration and tighten firmly.
3. Attach a snap hook 5/16" (15) to each eyebolt (4). Push end plugs (8) into the open ends of the frame pieces as shown. Attach the two chain supports (3) to the snap hooks (15). Slip the assembled viewing stand onto one of the two rails and lock in position with the quick release pins 5/16" x 3" (9). Now raise the platform so it is level and adjust the chain length in the snap hooks to hold the platform in position.

IMPORTANT

- Always use the quick release pins (9) to lock the viewing stand to the frame assembly (1).
- Once the viewing stand is in selected position and the support chain has been properly adjusted then fully close the snap hook (15).
- The viewing stand can be easily moved to either the left or right side of the batting cage. There are also two viewing heights 6" apart.