
AHA-XX ALUMINUM ALLOY MANUAL HEIGHT ADJUSTER (10' TO 8')

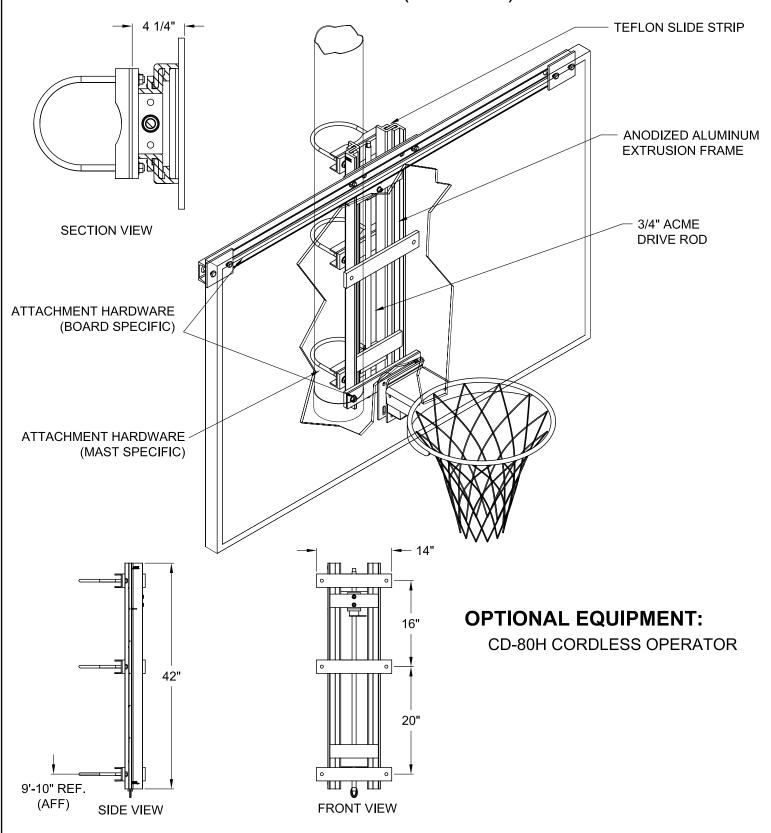

REV.	DESCRIPTION	DATE	BY	
COPYRIGHT 2006 JAYPRO SPORTS, LLC. ALL RIGHTS RESERVED				

AHA-XX

ALUMINUM ALLOY MANUAL HEIGHT ADJUSTER (10' TO 8')

THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, LLC. AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION



DRAWING NAME / PART NO.:			
AHA-XX			
DRAWN BY:	CHK'D BY:		
RJR	DEM		
ISSUE DATE:			
01/19/2006			
SHEET:	REV.		
1 OF 1			

AHA-XX

MANUAL ALUMINUM HEIGHT ADJUSTOR 10' 00"- 8' 00"

Height adjustor shall be manufactured of extruded high alloy aluminum and shall be screw driven in such a manner as to raise or lower the basket height of any bank from 8 feet to 10 feet. Screw drive shall be a 3/4" Acme thread rod secured in two bronze bushings. The screw drive shall have a loop welded to the bottom to allow attachment of the awning style crank. Operation of the unit is from the floor with the supplied crank. Slide/bearing surface shall run on a double Teflon impregnated aluminum "gib" insuring vibration free play for the entire range of operation (8' to 10'), as well as smooth effortless operation. Main body of height adjustor shall not exceed 14" in width. The Height adjuster shall be anodized black in finish. Height Adjustor shall not exceed 55 pounds in weight.

Height Adjustor shall be adaptable to any drop and/or any bank currently being sold. May require some slight modification in field for certain applications. Height adjuster is designed to mount directly to a 6-5/8" OD mast and can be adapted to other mast(s) with custom mounting hardware (purchased separately). Height adjuster is designed to allow for direct goal mounting and will preserve the backboard warranty when used with any Jaypro Sports backboard. Attachment tabs on the face of the height adjuster allow for attaching both rectangular and fan shaped backboards

The height adjuster shall be warranted free from manufacturing defects for a period of three years when used in conjunction with a Jaypro Sports backstop.